




Features

- -30V/-30A,
 $R_{DS(ON)} = 10m\Omega(Typ.)@V_{GS}=-10V$
 $R_{DS(ON)} = 14m\Omega(Typ.)@V_{GS}=-4.5V$
- Reliable and Rugged
- 100% avalanche tested
- Lead Free and Green Devices Available (RoHS Compliant)

Applications

- Switching Application Systems
- On Board power for server
- Synchronous rectification

Pin Description

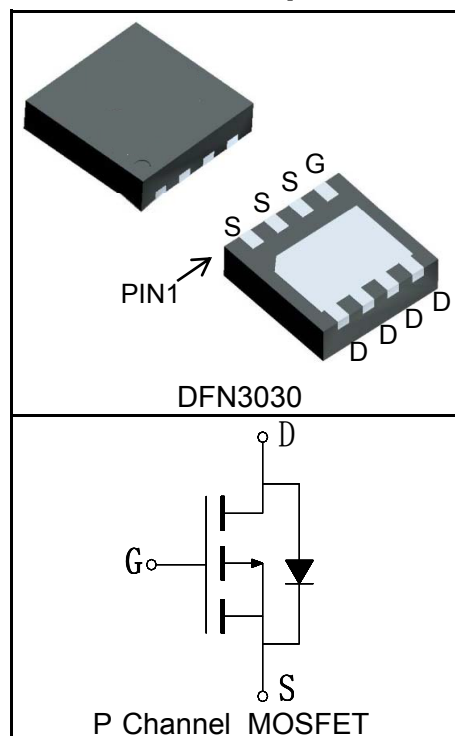

Absolute Maximum Ratings

Symbol	Parameter		Rating	Unit
Common Ratings (T _C =25°C Unless Otherwise Noted)				
V _{DSS}	Drain-Source Voltage		-30	V
V _{GSS}	Gate-Source Voltage		±20	
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	T _C =25°C	-30	A
Mounted on Large Heat Sink				
I _{DP} ^①	300μs Pulse Drain Current Tested	T _C =25°C	-102	A
I _D ^②	Continuous Drain Current@T _C (V _{GS} =-10V)	T _C =25°C	-30	A
		T _C =100°C	-20	
	Continuous Drain Current@T _A (V _{GS} =-10V) ^③	T _A =25°C	-9.6	
		T _A =70°C	-7.8	
P _D	Maximum Power Dissipation@T _C	T _C =25°C	33	W
		T _C =100°C	13	